


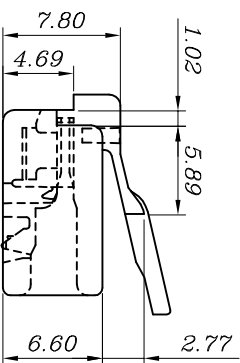
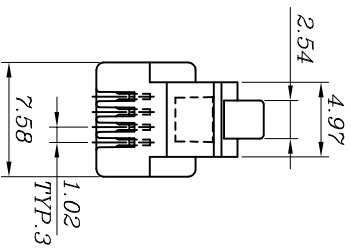


更改日期	设计内容	修改
REV DATE	MODIFICATION	DRAWN
2011/10/19		



Round



Flat

SPECIFICATIONS

1. ELECTRICAL:
 UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS AC.
 WITHSTAND VOLTAGE TIME: 60S.
 INSULATION RESISTANCE: 100 M Ω.
 TERMINATION RESISTANCE: 20m Ω MAX AFTER ENVIRONMENTAL TESTING.

2. MECHANICAL:
 CABLE-TO-PLUG TENSILE STRENGTH: 20POUND MIN.
 DURABILITY: 200 MATING CYCLES.

3. MATERIAL & FINISH:
 HOUSING: POLY CARBONATE, UL94V-0 OR UL94V-2.
 COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
 CONTACT BLADE: COPPER ALLOY.
 CONDUCTOR: STRANDED & SOLID WIRE .24AWG, 26 AWG.
 (It can be used for the wire OD from 0.96-01.02)

规范

1. 电器:

UL应用最大250VOLTS AC.

介质耐电压伏特数:1000VOLTS AC.

耐压时间:60S.

绝缘阻抗:100百万欧姆.

终端阻抗:在环境测试后最大可承

受20微欧姆终端阻抗.

2. 机构

拉力测试:至少20磅.

耐力测试:至少200次之插拔测试.

3. 材质表面处理

塑胶壳:聚碳酸酯,UL-94V-0 or UL94V-2.

颜色:透明,或者其他颜色亦可.

金片:铜合金.

导体:多股线&单股线,24AWG,26AWG.

(芯线直径: φ0.96-φ1.02均可适用)

镀金厚度:3u"~50u",皆可提供.

客户用产品图



BLADE:	E	EB	Y	YB	Z	A	AE	AB	EC	AL	ZL	YBL
Drawing												
Mark	✓											

GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"	CABLE TYPE	ROUND	FLAT
Mark						✓	Mark		✓



宁波卓新通讯连接器有限公司
 NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD

DIMENSION IN mm (Inch)	材 质	图 号
TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL	DWG NO.
.X±0.20	PC	PLUG-002-0002
.XX±0.10		
.X°±5°	名称	P44FE50V2
.XX°±2°	TITLE	

审核	核对	制图	比例	张数
沈红波	钟均江	Cathylili	2/1	1/1
APPROVAL	CHECKED	DRAWN	SCALE	SHEET
			角法	更改
			PROJ.	REV
				A