


EXW

NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD


PLUG:

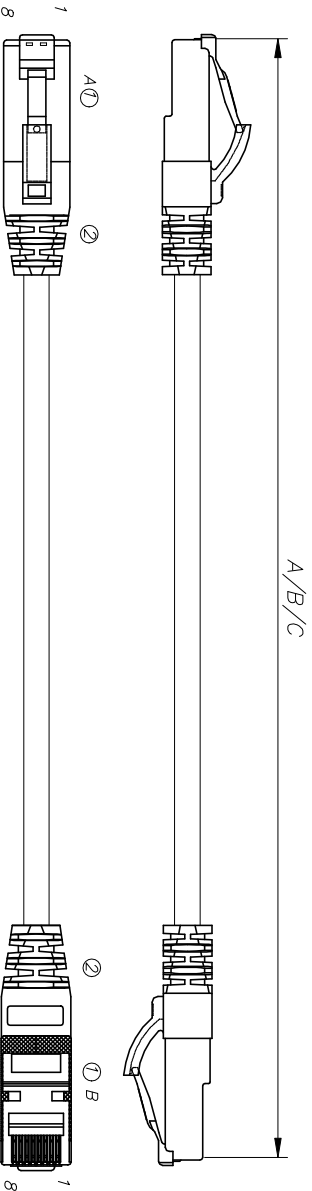

Drawing					
Mark	✓				
GOLD PLATING	3μl"	3u"	6u"	15u"	30u"
Mark					✓

TYPE	Shielded	Unshielded
Mark	✓	
PC	UL 94-V0	UL 94-V2
Mark		✓

ARRANGE METHOD:



The cable / plug / molding with antibacterial material.
 Antimicrobial activity complies with ISO 22196: 2011

- Smoke Density: IEC61034-2
- Halogen Amount: IEC60754-2

Remarks:

- I. "A" indicate the length 1-9M, tolerance +20/-0
- II. "B" indicate the length 10-20M, tolerance +150/-0
- III. "C" indicate the length above 20M, tolerance +(C*1%)/-0

ROHS

Issued
2021. 11. 25
R&D

ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	DWG NO.	
①	PLUG	P88REF50V2S(1.0)	transparent	2	⑥					P5EFFTB032-001	
②	PVC	60P	✓	8g	⑦						
③	Cable Tie	"C"MM	white	2	⑧					TITLE	
④					⑨					Antibacterial Patch Cord-Cat. 5e FTP	
⑤					⑩						
MATERIAL		WIRE CONNECTION		TABLE		LENGTH		TOTAL		MOLD NO.	
CAT.5E FTP PATCH CORD 26AWG	PVC	white / orange	white / green	blue	white / blue	green	white / brown	brown			
	LSOH	A1	A2	A3	A4	A5	A6	A7	A8	(A/B/C+20)*[19(0)]*[19(0)]	02-032
CABLE COLOR	red	orange	yellow	green	blue	purple	gray	white	black		
UNIT	mm	SCALE	1/1	SHEET	1/1	APPROVAL	CARLINE	CHECKED	ZACH	DRAWN	CATHYLI
DRAWN DATE	2021/11/25	PROJ.		REV	1						