




NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD



A/B/C

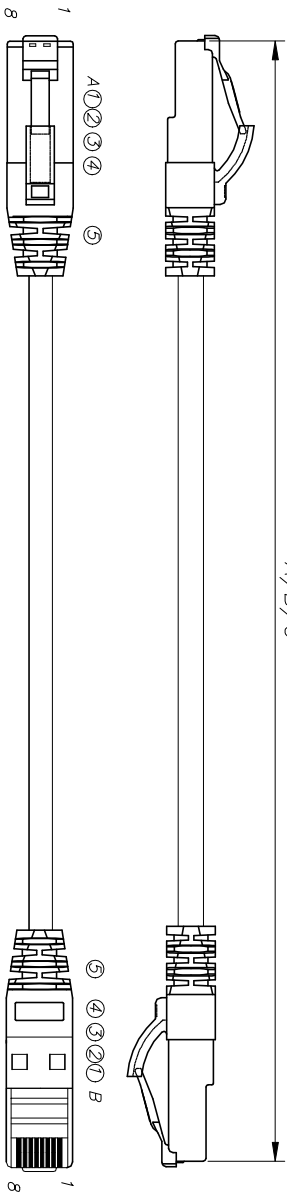

PLUG:

Drawing					
Mark					
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"
Mark					
TYPE	Shielded	Unshielded			
Mark					
PC	UL 94-V0	UL 94-V2			
Mark					

ARRANGE METHOD:



The cable / plug / molding with antibacterial material .  
Anti microbial activity complies with ISO 22196:2011

Remarks:

- I. "A" indicate the length 1-9M, tolerance  $\pm 80_0$
- II. "B" indicate the length 10-20M, tolerance  $\pm 150_0$
- III. "C" indicate the length above 20M, tolerance  $\pm (C*1\%)/-0$

ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	DWG NO.							
①	PLUG	G6R5Z50V2L-3E	transparent	2	⑥	Cable Tie		white	2	P6AUTB012-017							
②	Insert	3R 11.1 V2	transparent	2	⑦					TITLE							
③	Cross Insert	3E Ø5.6 V2(UP)	transparent	2	⑧					<b>Antibacterial Patch Cord-Cat. 64 UTP</b>							
④	Cross Insert	3E Ø5.6 V2(DOWN)	transparent	2	⑨												
⑤	PVC	60P		8g	⑩												
MATERIAL		WIRE CONNECTION TABLE								UNIT	mm						
CAT.64 UTP PATCH CORD 24AWG	PVC	white / orange	white / green	blue	white / blue	green	white / brown	brown	TOTAL	MOLD NO.	02-012	DRAWN DATE	2016/07/05	SCALE	1/1	SHEET	1/1
	LSOH	A1	A2	A3	A4	A5	A6	A7									
CABLE COLOR		red	orange	yellow	green	blue	purple	gray	white	black	APPROVAL	<b>Carine</b>	CHECKED	<b>Zach</b>	DRAWN	Cathyli	